





Labyrinth Wall Penetration Seals 4 pipes



Labyrinth Wall Penetration Seal 4 pipes

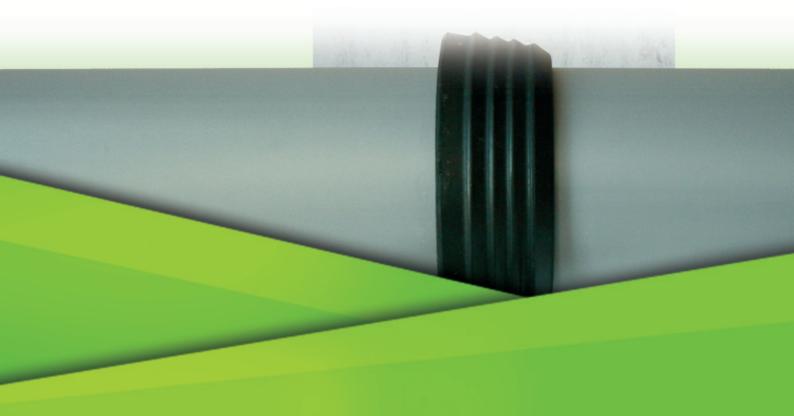





Product information

Labyrinth seals are directly cast into the wall at building wall penetrations, especially on preinsulated pipelines for district heating as a water stop that is tight against low external water pressure. The high-quality rubber ensures an extremely secure seal. Our Pressio wall penetration seal is suitable as a water stop that is tight against high external water pressure.


Application

Labyrinth seals are mainly applied on preinsulated pipelines (PE-jacket or flexible district heating pipelines).

- Pressure tight up to 0.5 bar water pressure

Advantages

- Fast mounting because no tensioning steel straps are necessary
- High-quality rubber ensures an extremely secure seal (up to pipe size 200 mm moulded in one piece)



ØD3 **installed** = D1 + 34±4 mm

The 4 pipes warranty only applies to faulty material. Checking the suitability of the product for the individual application is solely the responsibility of the user. Available sizes OD 65 mm up to OD 1400 mm.

Application manual

- 1. Push Labyrinth seal over the cleaned casing pipe Stretchable to tolerances acc. to EN253
- 2. Cast Labyrinth seal directly in the middle of the wall

| OD pipe in mm | ArtNo. Labyrinth Seal |
|---------------|-----------------------|
| 65 | 12900 |
| 75 | 12901 |
| 90 | 12902 |
| 110 | 12903 |
| 125 | 12904 |
| 140 | 12905 |
| 143 | 12906 |
| 160 | 12907 |
| 180 | 12908 |
| 200 | 12909 |
| 225 | 12910 |
| 250 | 12911 |
| 280 | 12912 |
| 315 | 12913 |
| 355 | 12914 |
| 400 | 12915 |
| 450 | 12916 |
| 500 | 12917 |
| 560 | 12918 |
| 630 | 12919 |
| 670 | 12920 |
| 710 | 12921 |
| 800 | 12922 |
| 900 | 12923 |
| 1000 | 12924 |